


Data Sheet: **RG BSEN**

Steel encapsulated/particle board construction, loose laid raised access floor panels to the requirements of BSEN 12825.

Corner Detail

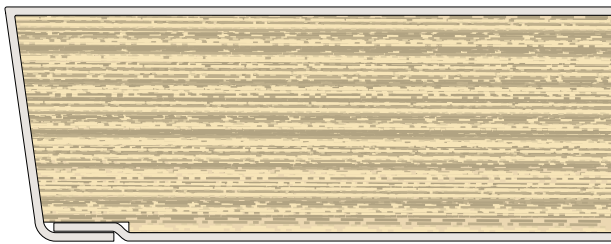

Panel Illustration



Feature Benefits

- High edge strength reducing edge to edge deflection
- Precision construction and location for an accurate floor grid
- Solid underfoot
- Steel wrap round design ensures excellent electrical continuity is maintained
- Good acoustic performance
- Safe and easy access
- Excellent lateral stability
- 600mm x 900mm oversize panels available in order to minimise perimeter cutting
- The system meets EN13501 Parts 1 & 2 and also its construction provides Class O to BS476 fire rating

Typical Areas of Application

General office areas, light, medium and heavy use.

Description

This loose laid floor panel range is fully rated to the requirements of the Harmonised European Standard for raised access floors, BSEN 12825. The design incorporates a unique wrap-around construction which makes panel removal and replacement easy. This design also improves panel edge strength and accessibility. With a wide range of optional factory accessories and applied finishes this panel construction is at the heart of the range of raised floor systems available from Kingspan Access Floors. This RG series of panels is world renowned for its exceptional characteristics of strength and durability.

Category	Loose lay
Panel Size	600mm square
Core Material	High Density Particle Board
Panel Construction	Galvanised steel encapsulated particle board core

	Panel Thickness (nominal) excluding covering	System Weight (typical)
RG3	31mm	31kg/m ²
RG5	31mm	36kg/m ²
RG6	32mm	44kg/m ²

Construction

These floor panels are based on a 600mm square module constructed around a high performance chipboard core. The galvanised steel shell comprises of a top sheet that is wrapped around and laminated to the particle board core. This is then mechanically stitched to the bottom steel sheet for greater strength and to provide full electrical continuity of the system. Positive location and retention of the floor panel is achieved by the use of a moulded plastic cap.

Data Sheet: **RG BSEN**

Structural Performance

Panel Type	BSEN 12825 Classification	Ultimate Load	Uniformly Distributed Load
RG3	3/A/3/2	In excess of 8kN	15kN/m ²
RG5	5/A/3/2	In excess of 10kN	20kN/m ²
RG6	6/A/3/2	In excess of 12kN	25kN/m ²

- The above information is based on testing in compliance with the BSEN 12825 specification. The classifications shown are based on a deflection under working load not exceeding 2.5mm and a safety factor of 3.
- Uniformly distributed loads are shown for information as they do not form part of BSEN 12825. However the figures shown are based on testing in accordance with BSEN 12825.
- Finished floor heights from 65mm to 380mm are available using one of our standard pedestals. For heights outside of this range alternative pedestals are available.
- The classifications given are based on the use of the Kingspan range of pedestals.

Special Applications

Acoustic Performance	Airborne sound insulation rating in the range of 38-44dB, impact sound insulation rating in the range of 67-69dB. These are indicative laboratory figures for the bare panel only with no barrier in the void. These ratings are determined according to BS EN 717-2 1997. The tests were carried out in accordance with BS EN 140-3 and BS EN 140-12.
Air Seals	Used to minimise air leakage through raised floor, air leakage of 0.44litres/sec/m ² at a pressure of 25Pa. This is an indicative figure only based upon laboratory testing.
Bridging Sections	Where obstructions in the void prevent the use of pedestals.
Foil Tape	Aluminium foil tape to seal the edge of cut panels.
Pedestal Mechanical Fixings	To fix pedestals to floor in addition to adhesive for greater rigidity at increased floor heights/increased loadings or in situations where the sub-floor requires additional fixing.
Pedestal Earth Clamps	Provides an electrical connection to the floor system for earth bonding purposes. All conductive components of the raised access floor must be earth bonded in accordance with BS 7671-2001, 16th Edition Wiring Regulations.
Perimeter Gasket	20 x 9mm foam tape applied to the panel edge between floor and wall if required.
Ramps and Steps	Provided to accommodate changes in floor level.
Simploc	Factory applied variation to allow panels to be screw fixed to pedestals.
Stringers	Snap on:- provide additional lateral stability at increased floor heights. Bolt on:- provide additional lateral stability and increased load bearing properties.