

Bitu-Mend[®]

Bitumen-based repair compound



Rapid repair for pot-holed asphalt and concrete

Watco Bitu-Mend is a durable bitumen-based patch repair for use on exterior pot-holed asphalt and concrete. Repairs with Watco Bitu-Mend are ready for instant trafficking.

Many Uses


Ideal for pot-holes in roadways, vehicle parks, loading docks, paths, airfields etc, on bituminous and concrete surfaces.

Watco Bitu-Mend is applied as a soft, flexible material which gradually hardens over time following application. The repair can be instantly trafficked by cars.

Wear Resistance

Compacts to a dense hard surface that will resist vehicle and pedestrian traffic.

- Repairs can be driven over immediately
- Extremely simple to use
- No hacking necessary
- Withstands heavy traffic
- Includes easy to use primer
- Suitable for holes between 25mm and 100mm deep

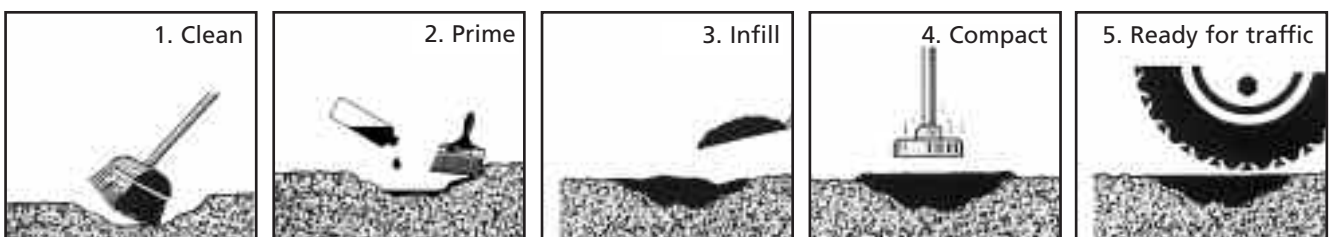

Watco Bitu-Mend

Composition

Polished aggregate together with liquid binder based on bitumen plus resins and adhesives.

Availability

25kg including primer.

Appearance

Black, granular and bituminous. Bitu-Mend Red is a dark, tile red colour.

Shelf Life

At least one year.

Storage

Re-fit container lid tightly after use. Store in a warm location.

Surface Preparation

Remove all loose material and surface water, oil etc.

Application

Pour the primer onto the prepared surface and spread using a brush. Tip or shovel out sufficient material into the hole to slightly overfill it and then compact with the back of a shovel or tamper.

In exceptional temperature conditions advice should be obtained from Watco's Technical Department.

Curing

The repair may be driven over immediately and the product will harden over time following application.

Coverage

25kg will cover approximately 0.5m² at 25mm thick. The product can be applied at up to 100mm thick.

Safety

All product labels provide general safety information. Material Safety Data Sheets are available. Food products must be removed from the area during application and cure.

Ordering

Available direct from Watco UK Limited and through agents worldwide. All Watco products are sold subject to the Company's Standard Conditions of Sale.

The Company and its representatives are often asked to comment on potential uses of Watco products which differ from those described in the Company's data sheets. Whilst in such cases the Company and its representatives will always try to offer helpful and constructive advice, the Company cannot be held responsible for the results of such uses unless they are specifically confirmed in writing by Watco.



Watco UK Limited

Watco House, Filmer Grove, Godalming, Surrey GU7 3AL, UK
Tel: 01483 42 5000 • Fax: 01483 42 8888
www.watco.co.uk • E-mail: sales@watco.co.uk

© Watco UK Ltd December 2005



ISO 9001 quality
standard for supply